

BR-355-S4

GPS Receiver

- SiRF Star IV
- 48-Channel All-In-View Tracking
- NMEA 0183
- WAAS/ EGNOS Support
- 2.08" Diameter X 0.75"
- Built-In Supercap For Rapid Acquisition
- Built-In GPS Patch Antenna
- Built-In Roof Mount Magnet
- Serial Port Interface



The BR-355-S4 GPS Receiver can be utilized in a variety of applications which require GPS signals to be received and decoded in your Windows laptop or tablet, and for Mac users, Macbooks, or Macbook Pros. Compatible with most NMEA compliant third-party software, the BR-355-S4 is suitable for use in vehicle, marine and aviation navigation, as well as commercial and municipality applications such as fire trucks, police cars, buses, GIS data collection and much more! The BR-355-S4's slim profile housing is completely waterproof and incorporates an active patch antenna for the highest level of GPS accuracy.

With a 60" cable, placement of the GPS receiver within the vehicle is not critical, however in those rare occurrences when towering high-rises offer challenging satellite reception, simply place the BR-355-S4 on the vehicle's roof (attaches via its built-in magnet) for improved performance. Since power and data are transferred through the BR-355-S4's cable, there's no need for batteries or any other external power source.

Serial GPS Receiver

General Specifications

GPS Chipset.....SiRF Star IV
 Frequency.....L1,1575.42 MHz
 C/A Code.....1.023 MHz Chip Rate
 Channels.....48 all-in-view tracking
 Sensitivity.....-163 dBm
 Accuracy.....< 2.5m 2D RMS SBAS Enabled

Aquisition Rate

Hot start.....1 sec., average
 Warm start.....35 sec., average
 Cold start.....35 sec., average
 Reacquisition.....0.1 sec. average
 Update rate.....1Hz

Protocol

GPS Protocol.....Default: NMEA 0183 (Secondary: SiRF binary)
 GPS Output Data.....SiRF binary >> position, velocity, altitude, status
 and control NMEA 0183 V3.0 protocol (GGA, GSA, GSV, RMC, VTG, GLL, ZDA)
 GPS transfer rate.....Software command setting (Default : 4800,n,8,1 for NMEA)

Dynamic Condition

Acceleration Limit.....Less than 4g
 Altitude Limit.....Max 60,000 Feet (18,000 meters)
 Velocity Limit.....Max 515 Meters / sec (1000 Knots / 151 MPH)
 Jerk Limit.....20 m/sec**3

Environmental Specifications

Operating.....-40~ 185°F (-40~ 85°C)
 Storage.....-40~ 185°F (-40~ 85°C)
 Humidity.....Up to 95% non-condensing


Electrical Characteristics

Voltage.....4.5V - 5.5V
 Current.....55mA Maximum

Physical Characteristics

Dimension.....2.08" diameter x 0.75" (53mm dia. x 19.2mm)
 Cable Length.....59" (1,500 mm)
 Weight.....2.2Ounces (62.37g)

PACKAGE CONTENTS:

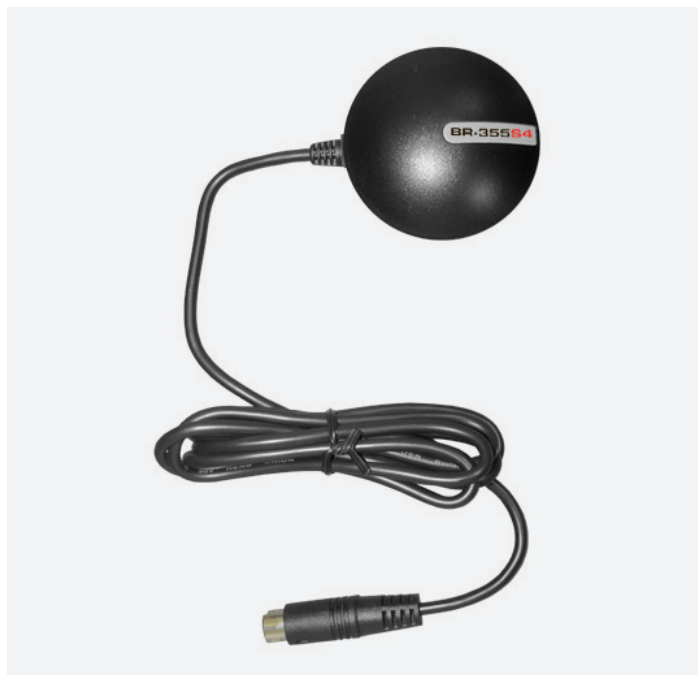

Suction Cup

	48 CHANNEL	WIN
SERIAL	SiRF IV	MAC

Taiwan
 GLOBALSAT INCORPORATED
 16F, No. 186, Jian Yi Road, Chung Ho City
 Taipei Hsien, Taiwan
 T: +866-2-82263799 F: +866-2-82263899
 globalsat.com.tw service@globalsat.com.tw

North America
 USGLOBALSAT, INC.
 14740 Yorba Court
 Chino, CA 91710
 T: +909-597-8525 F: +909-597-8532
 usglobalsat.com sales@usglobalsat.com

CE FC Canada 210 Bluetooth BR-355-S4 Made in Taiwan
GLOBALSAT TECHNOLOGY CORPORATION
 ©2009 Globalsat Technology Corporation. All rights reserved.
 All trademarks, tradenames & brands are registered to their respective owners.

BR355S4-08272013B